


Power Wirewound Resistors axial leaded Type: RX21

Features:

- High power at small sizes
- High pulse load resistance
- Derating from 70°C to 275°C

Dimensions:

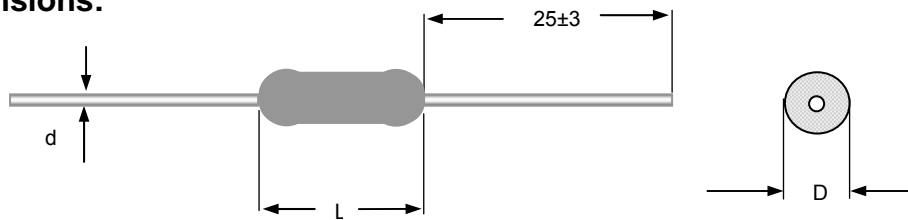

Technical data – depending on size:

Type	Power $P_{70}(W)$	Resistance range	Dimensions(mm)		
			L max	D max	d max
RX21-0.5	0.5	0R01...68R	10	4.5	0.65
RX21-1	1	0R01...330R	15	5.5	0.85
RX21-3	3	0R01...3K9	16	7.5	0.85
RX21-4	4	0R01...8K	26	10.0	0.85
RX21-6	6	0R01...9K	26	10.5	0.85
RX21-8	8	0R01...27K	34	11	1.05
RX21-10	10	0R01...33K	40	11	1.05
RX21-12	12	0R01...39K	48	11	1.05

Technical data - general:

Tolerances	1%, 5%
Temperature coefficient	$\pm 250\text{ppm/K}$
Temperature range	$-55^{\circ}\text{C} \dots +275^{\circ}\text{C}$
Short time overload	$\Delta R < \pm 1\%$
Load Life	$\Delta R < \pm 5\%$
Resistance to soldering heat	$\Delta R < \pm 1\%$

Issue 06/05